
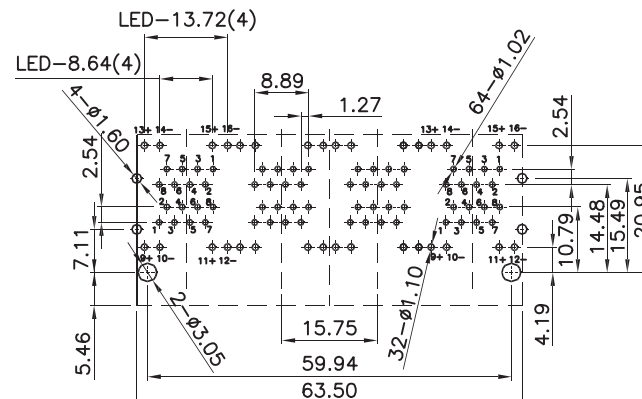

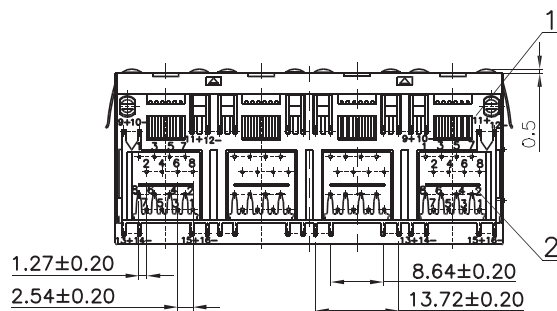
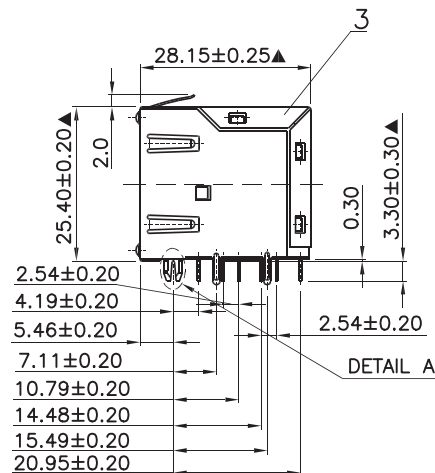


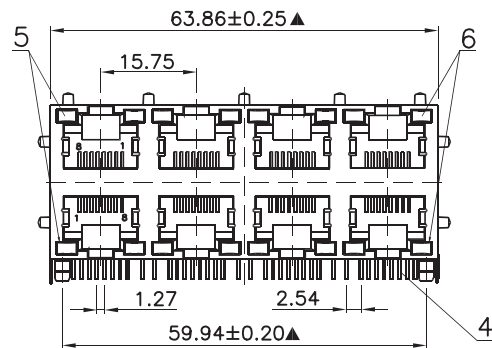

RECOMMENDED PCB LAYOUT TOP VIEW
(COMPONENT SIDE TOLERANCE±0.05)

LED Pin Define:	
1:Green +○-○-	2:Yellow +○-○-
3:Red +○-○-	4:Orange +○-○-
5:Green+Yellow +○-○- Green Yellow	6:Yellow+Green +○-○- Yellow Green

NOTES:

- Housing:Glass Filled PA46 Black.
- Insert:Glass Filled PBT Black.
- Shielding:Copper Alloy with Nickel Plated.
- Contact:035x0.45mm Phosphor Bronze, Gold Plating Over Nickel.
- LED Left:See Part Number.
- LED Right:See Part Number.
- Part Number:
JAKR-9D88 - G ** - BB 5X S *

LED Left/Right:
1-Green 2-Yellow
3-Red 4-Orange
5-Green+Yellow
6-Yellow+Green

Gold Plated:
0-Gold Flash
1-3u" 2-6u"
3-15u" 4-30u"

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.x = ± 0.35 x.xx = ± 0.25 Angle ± 5.0° x.xxx = ± 0.15				2x4 RJ45 LED Jack Connector STP-W/Top & Side Tabs-W/4 Groundings			
			UNIT				
			mm				
DRAWN	Bella	DATE	2018/11/12	PART NO.	JAKR-9D88-GXX-BB5XSX		
SCALE	N/A	SIZE	A4	SHEET	1/1	REV	A