



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2018/11/29	
B	CHANGE DRAWING	2019/01/08	
C	CHANGE CABLE	2019/01/10	

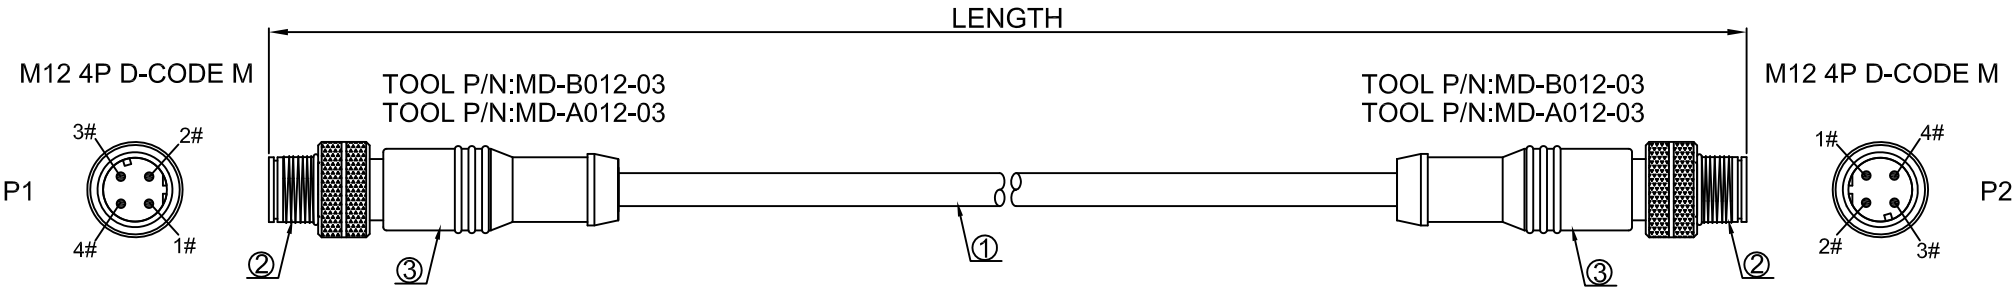

PIN ASSIGNMENT

PART NUMBER	LENGTH
SE-S-0370-2M	2000±30
SE-S-0370-5M	5000±50
SE-S-0370-10M	10000±100
SE-S-0370-20M	20000±150

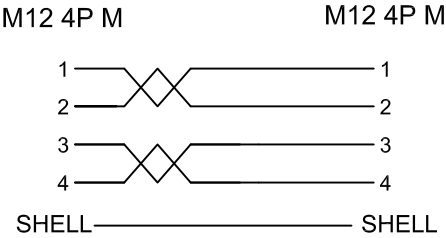

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01~0.18sec.
 - CONTACT RESISTANCE:3~5 ohm MAX.

3		G0003	ALL CONNECTORS OVERMOLD GREEN PVC.
2	2	A0675	M12 4P D-CODE MALE BLACK INSULATOR SOLDER TYPE.
1	1		CAT.5E STP 24AWG*4P OD:6.0MM GREEN PVC JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	DENG ZHIFEI	SCALE	FREE	TITLE				
CHECK,BY	<i>Caojiawei</i>	REV	C	M12 4P M/M12 4P M				
APP,BY	<i>Mr. Huang</i>	DATE	2018/11/29	TOLERANCES				
DWG NO.	SE-S-0370			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	SE-S-0370-XM			SHEET	1/1	SIZE	A4	