
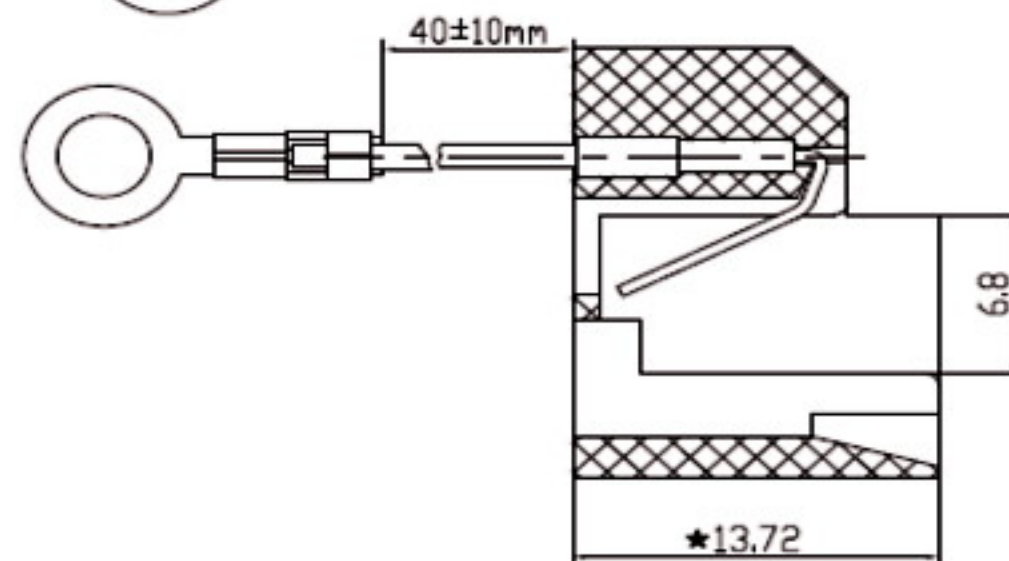
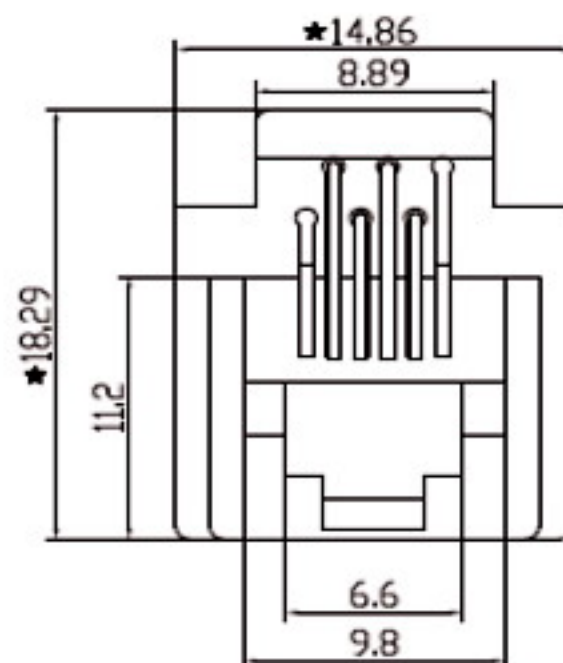
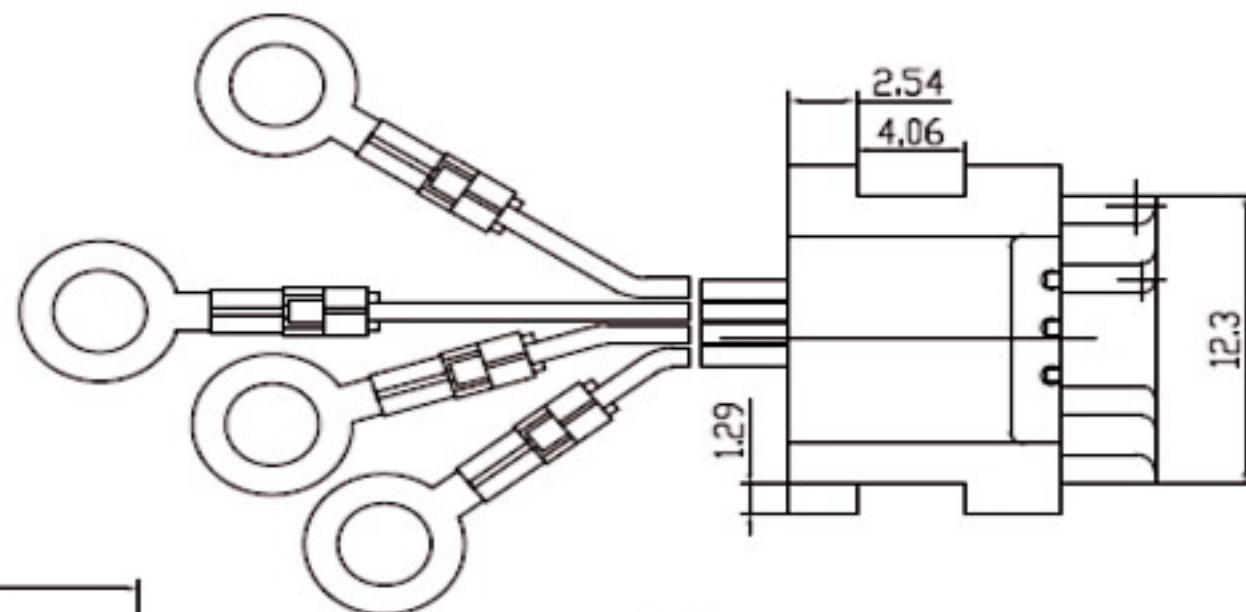


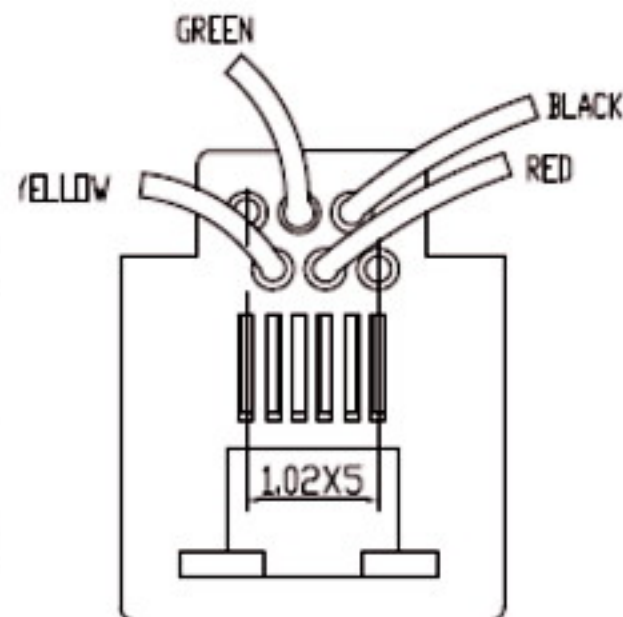

Specification:

1. Insulation resistance:
500 megohms min @500 VDC.
2. Withstand Voltage:
AC 1000V, 50Hz or 60Hz minute.
3. Durability:
600 mating circles min.
4. Gold Plating: (3;6;15;30;50)u inch

Remark:

1. Tolerances unless otherwise specified:
0□0.25; .00□0.20; .000□0.10
5. The mark with * is the key inspection dimension for QC.

UNIT	mm	Projection		Secom International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x = ±	.xxx = ±			PCB Jack connector 623K 6P4C-O Terminal			
.x = ±							
.xx = ±							
DRAWN	Kevln	DATE	2006/5/8	PART NO.	JAKT-S623K-6P4C-O		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A1