
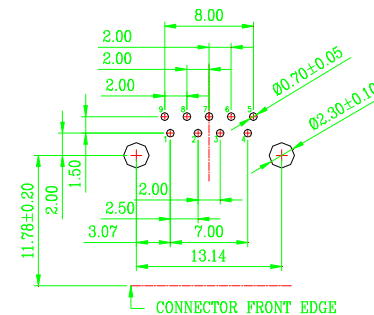


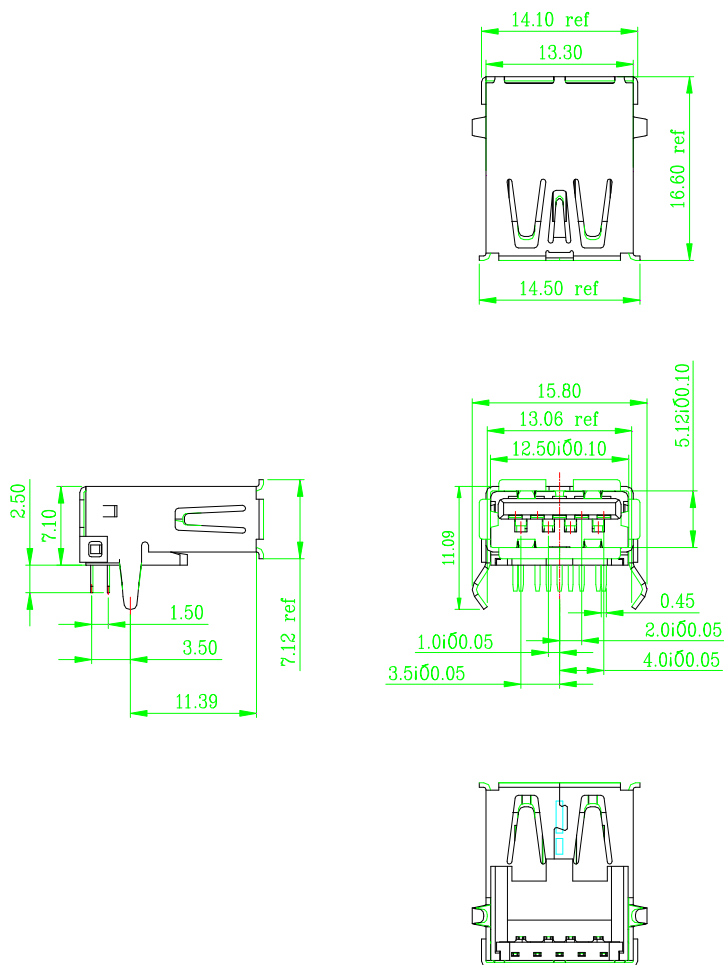

- NOTES:
- MECHANICAL:
MATING: 35N MAX.
WITHDRAWAL: 10N MIN.
DURABILITY: 1500 CYCLES MIN.
 - ELECTRICAL:
CURRENT: 100mA MAX
VOLTAGE: 20mV MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 30 mΩ MAX/50mΩ MAX
INSULATION RESISTANCE: 1000MΩ MIN

UNIT	mm	Projection	Se	Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x. = ±	.xxx = ±			USB AF 3.0 R/A DIP Type Connector			
.x = ±							
.xx = ±							
DRAWN	Kevin	DATE	2009/3/12	PART NO.	USB-SDA03-AF09		
SCALE	4/1	SIZE	A4	SHEET	1/1	REV	A0