
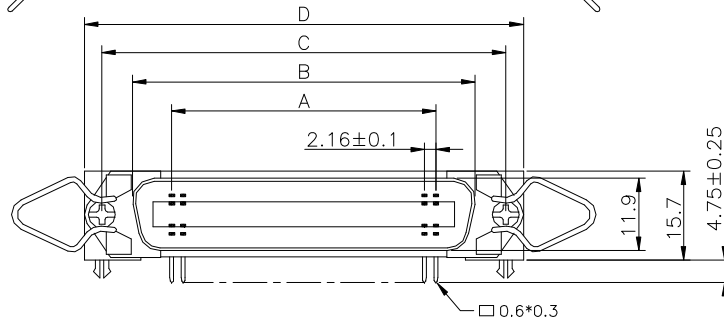

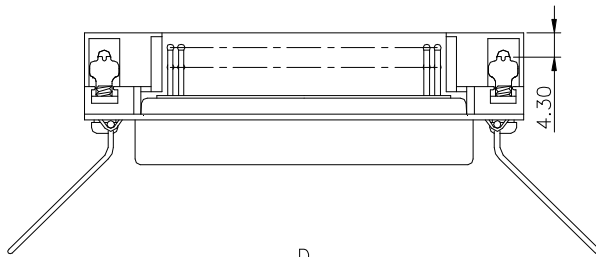


1 2 3 4 5 6 7 8



Positions	A	B	C	D
36	36.72	48.9	59.7	67.7
50	51.84	64.1	74.9	82.8

Material & finish

SHELL:

Steel
Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor Bronze
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

CURRENT RATING:

1 Amp

DIELECTRIC STRENGTH:


1000V for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

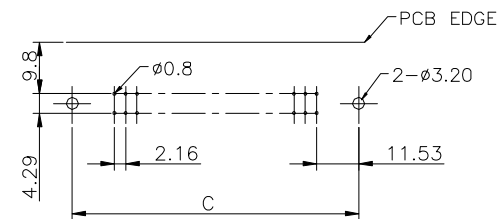

P.C.B. LAYOUT

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x. = ± .xxx = ± 0.15 .x = ± 0.30 Ang: ±2° .xx = ±0.25				57LE-SRD36F			
DRAWN	Kevin	DATE	2008/1/3	PART NO.	57 Centronic Connector Right Angle Dip Type		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0

1 2 3 4 5 6 7 8