

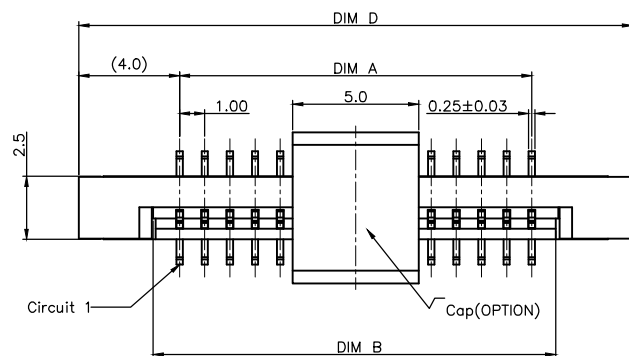



1. Material:
 - 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
 - 1.2 Latch: thermoplastic high temp. UL94V-0; Color: Black.
 - 1.3 Terminal: Copper Alloy.
 - 1.4 Cap: thermoplastic high temp. UL94V-0; Color: Black.
2. Plating:
 - 2.1 Terminal: Gold/Tin Plated on Nickel Overall.

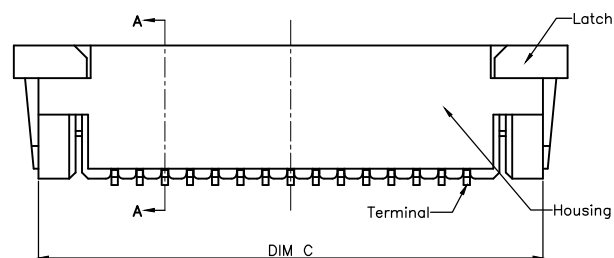


Ordering Information:


SERIES NO.	PIN No.	PLATING	PACKAGE
FPC10K2V	XX	P: Pure Tin	T: Tube
		G: Gold Flash	R: Tape&Reel (900pcs/R)
		...	K: Tape&Reel w/Cap (800pcs/R)
			...

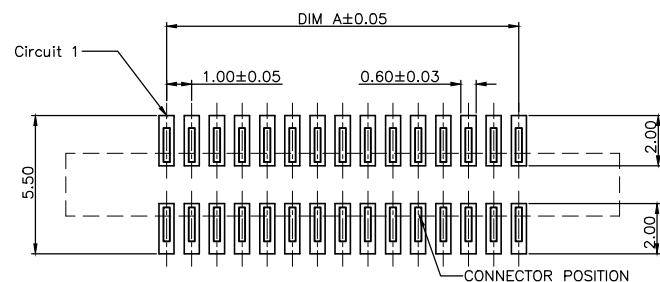

RECOMMENDED PCB LAYOUT

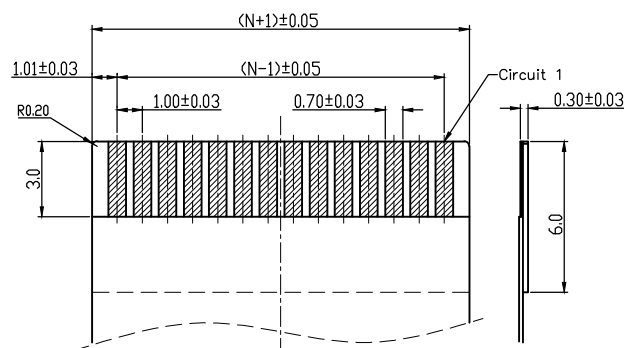

RECOMMENDED FPC/FFC DIMENSION



PIN NO.	DIM. A	DIM. B	DIM. C	DIM. D
4~N~40	N-1.0	N+1.1	N+5.1	N+7.0

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.x	= ± 0.20	x.°	± 5.0°		1.0mm ZIF FPC Connector SMT Vertical Type H: 5.5mm		
x.xx	= ± 0.15	x.°	± 2.0°				
x.xxx	= ± 0.10	.xx°	± 1.0°				
DRAWN	Amben	DATE	2016/02/26	PART NO.	FPC10K2V-XX-P-R		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A6