
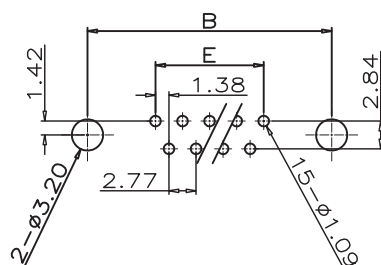
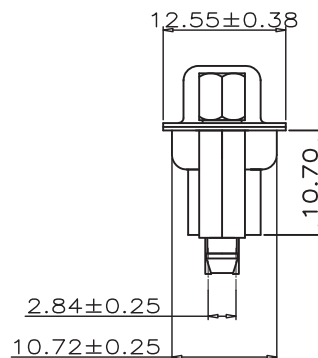


RoHS Compliant

REV.	ECN NO.	DESCRIPTION	REVISER	DATE
A0		NEW	H.H.F	16-06-21

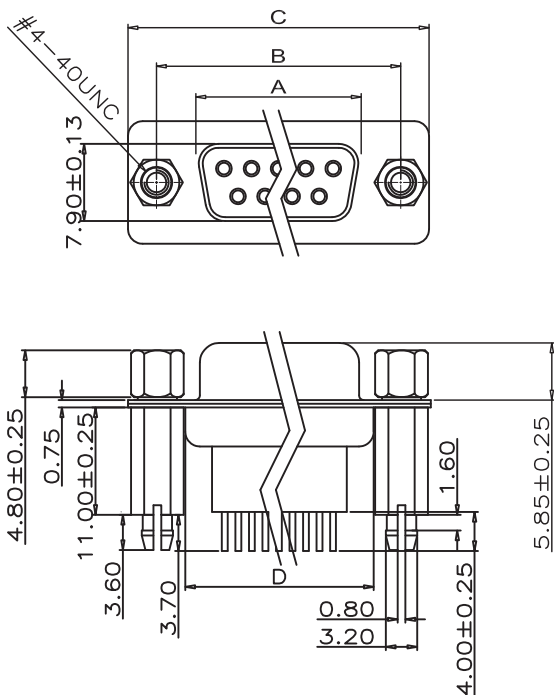

P.C.B LAYOUT

NOTE:

- 1.MATERIALS AND FINISHED
INSULATOR : PBT+30% GF UL 94V-0,BLACK COLOR
SHELL : STEEL, NI OR SN FINISHED
CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED
RIVETED INSERT: BRASS MATERIAL ,TIN FINISHED
WITH #4-40 THREADED ASSEMBLED
- 2.ELECTRICAL CHARACTERISTICS
CURRENT RATING : 1.0 AMP DC
VOLTAGE RATING: 300 V DC
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
- 3.ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C ~ +85°C
STORAGE TEMPERATURE:-55°C ~ +105°C
- 4.HOW TO ORDER:

SDP F 1 1 1-XX X X X X P-B X 7 2 0 1

Female
09:9PIN
15:15PIN
25:25PIN
37:37PIN

G:Gold Plating
S:Selevite Gold Bright TIN

1:1u"
2:2u"
3:3u"
9:足1u"

1:FORNT SHELL-NI
Front SHELL SN
4.FULL Gold
5.FULL NI

5:4.8*11.8 Copper Alloy
6:4.8*11.8 STEEL

A:No screw type
B:Ass'y screw type
C:Attach screw type

P:PBT

B:Black
L:LIGHT Blue
U:Dark Blue(661C)
G:Green(322C)

09	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86
No. of Contact	A±0.25	B±0.25	C±0.38	D±0.25	E±0.25

Seconn International Enterprise Co., Ltd.						
TOLERANCES			PROJECTION	TITLE		
x. = ±0.38	x.° ± 2.0°			D-SUB Connector Female High 180 Deg. Dip P.C.B. Type 魚叉開槽反向		
x.x = ±0.35	x.° ± 1.0°					
x.xx = ±0.25	.xx° ± 0.5°					
x.xxx = ±0.15	.xxx° -----					
DRAWN	H.H.F	DATE	2016/06/21	PART NO.	SDPF111-XXXXXXP-BX7201	
SCALE	1:1	SIZE	A4	SHEET	1/1	REV A0