



DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2012/11/08	
B	CHANGE CABLE	2012/11/20	
C	ADD CARTON LABEL	2012/11/26	

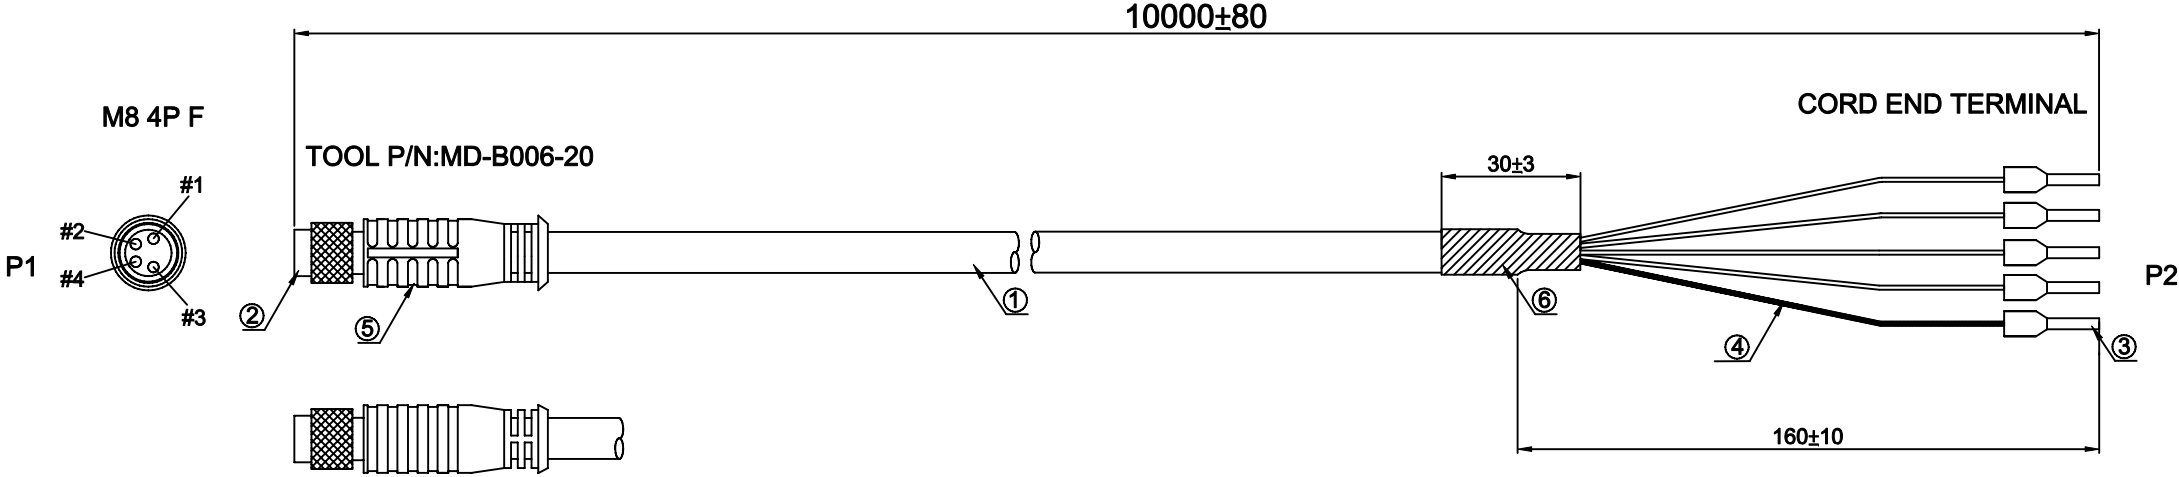

- NOTES:
- 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 - 2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN. DC 300V 0.08sec.
 - (c). CONTACT RESISTANCE:3 ohm MAX.
 - 3. ROLLED UP AND TIED WITH PE THIN FILM.

PIN ASSIGNMENT

M8 4P F		CORD END TERMINAL
P1		P2
1	BROWN	TERMINAL
2	WHITE	TERMINAL
3	BLUE	TERMINAL
4	BLACK	TERMINAL
SHELL		TERMINAL

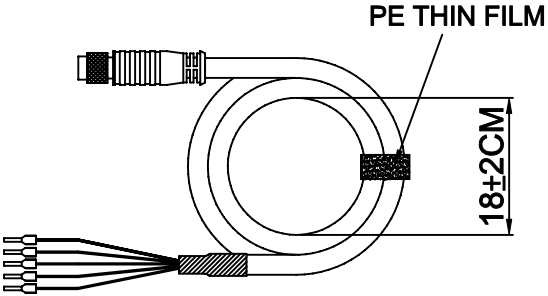

6	1		BLACK HEAT SHRINK TUBE.
5		G0001	M8 4P FEMALE CONNECTOR OVERMOLD BLACK PVC.
4	1		TRANSPARENT TUBE.
3	5	B0300	TERMINAL: 22AWG WHITE CORD END TERMINAL (HE 0508).
2	1		M8 4PIN FEMALE, BALCK INSULATOR,SOLDER TYPE, WITH SHELL.
1	1		22AWG*4C+EA, OD:5.0MM,BLACK PVC JACKET, UL2464.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	Huang shenggen	SCALE	1:1	TITLE	
CHECK,BY	Bao jawei	REV	C	M8 4P F TO TERMINAL	
APP,BY	Mr.Huang	DATE	2012/11/08	TOLERANCES	
DWG NO.	SE-S-0056			X.= ±	.X= ±
PART NO.	0377-000-001			.XX= ±	.XXX= ±
				SHEET	1/2
				SIZE	A4