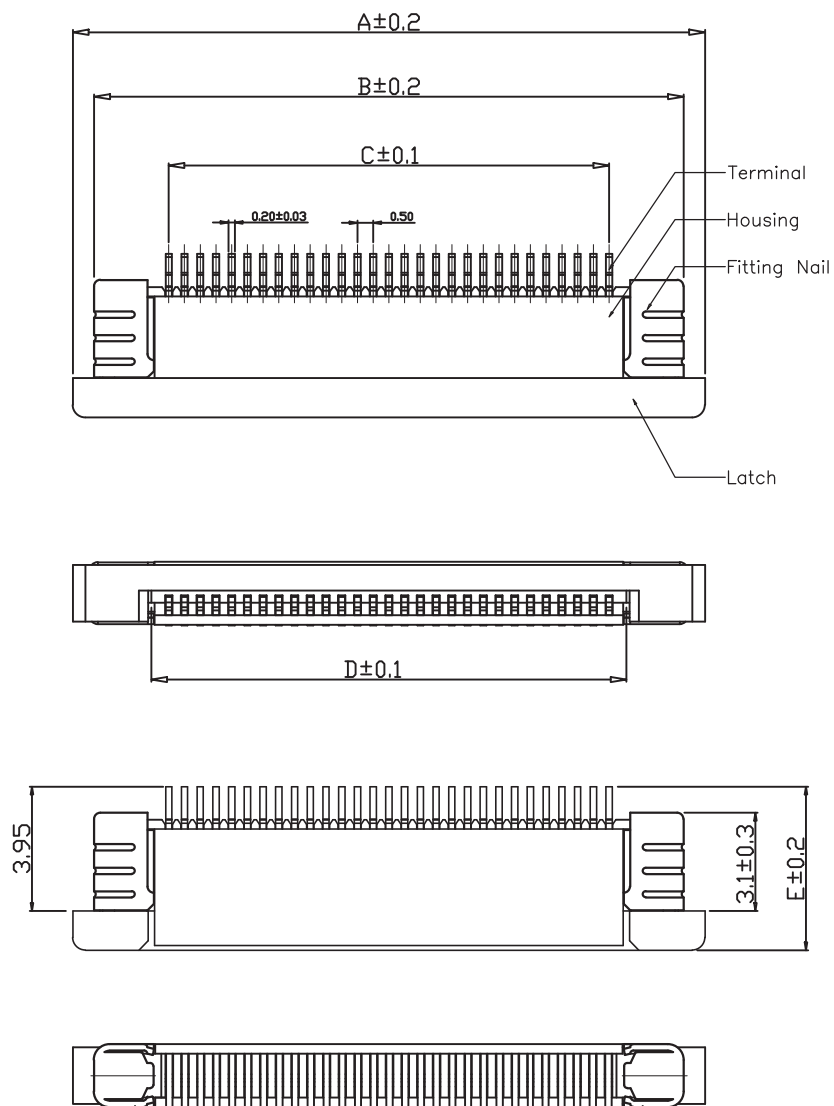


Material:

- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
- 1.2 Latch: thermoplastic high temp. UL94V-0; Color: Black.
- 1.3 Terminal: Copper Alloy.
- 1.4 Fitting Nail: Copper Alloy.

ORDER INFORMATION





FPC05A3 — X — XX — P — R

SERIES NO. CONTACT TYPE. PIN No. CONTACT PLATING PACKAGE

A: ABOVE
D: DOWN

P: Pure Tin
G: 1u Gold
...

T: Tube
R: Tape/Reel

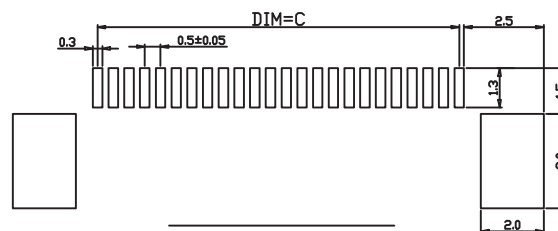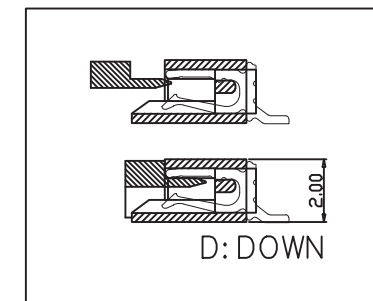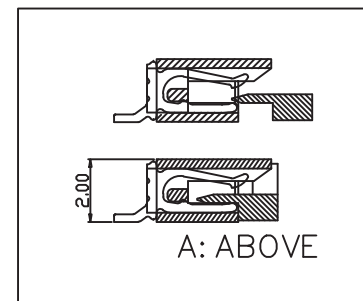

PIN NO.	DIM. A	DIM. B	DIM. C	DIM. D
4~N~60	$N \times 0.5 + 5.6$	$N \times 0.5 + 4.6$	$N \times 0.5 - 0.50$	$N \times 0.5 + 0.60$
DIM. E	4~N~34 E=5.25 ; 35~N~60 E=5.75			



Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.	± 0.20	x.°	$\pm 5.0^\circ$		0.5mm ZIF FPC SMT RIGHT ANGLE TYPE Connector H:2.0mm		
x.x	± 0.15	x.°	$\pm 2.0^\circ$				
x.xx	± 0.10	.xx°	$\pm 1.0^\circ$				
DRAWN	WALLY	DATE	2013/02/01	PART NO.	FPC05A3-D-XX-P-R		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A