


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2020/11/12	

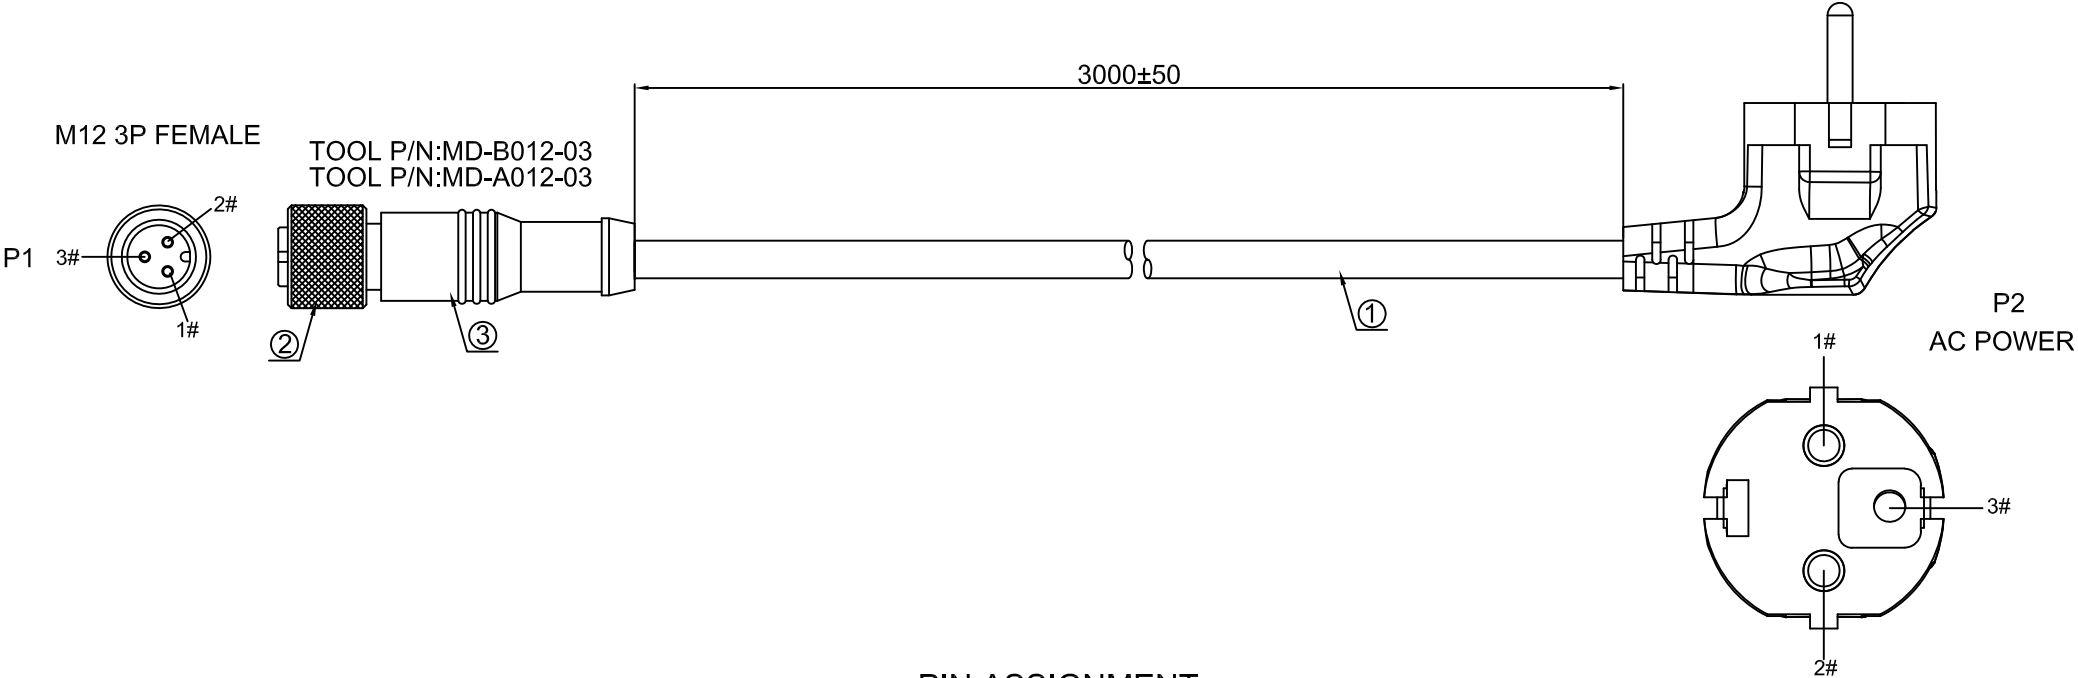

PIN ASSIGNMENT

P1	P2
1 ——— YELLOW/GREEN ———	3
2 ——— BLUE ———	2
3 ——— BROWN ———	1

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.

2. ELECTRICAL TEST CONDITION:

(a).100%OPEN,SHORT & MISWIRE TEST,

(b). INSULATOR RESISTANCE:20 Mohm MIN.

DC 300V 0.01sec.

(c). CONTACT RESISTANCE:3ohm MAX.

3.M12 CONNECTOR AC 250V 15A.

4.AC CONNECTOR AC 250V 16A.

3	1	G0001	CONNECTORS OVERMOLD BLACK PVC 50P.
2	1		M12 3P FEMALE SOLDER TYPE,BLACK INSULATOR. (WP-03F2-47-11)
1	1		90°AC POWER OD:7.2MM BLACK.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		 Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Luyangchun</i>	SCALE	FREE	TITLE			
CHECK,BY		REV	A	M12 3P F/90° AC POWER			
APP,BY		DATE	2020/11/12	TOLERANCES			
DWG NO.	SE-S-0422			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0422			SHEET	1/1	SIZE	A4