


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2020/11/12	

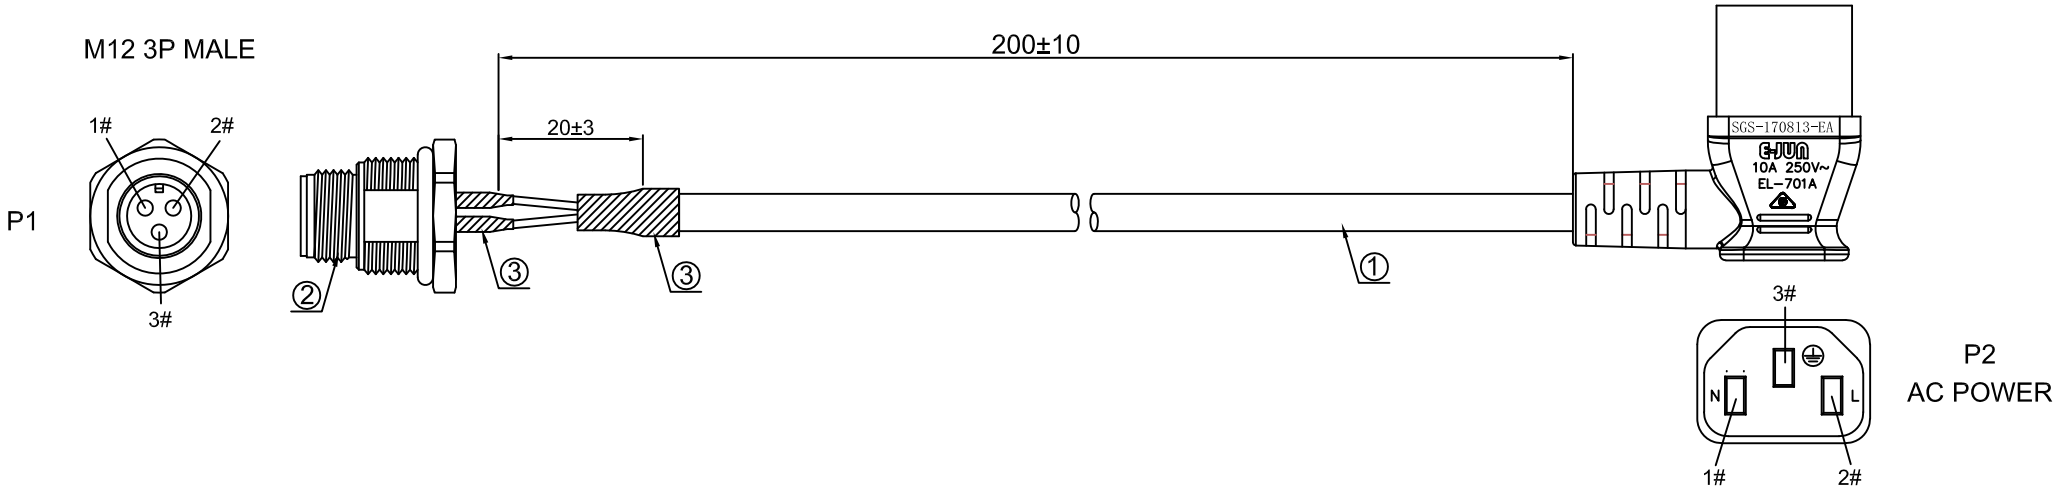

PIN ASSIGNMENT

P1	P2
1 ——— YELLOW/GREEN ———	3
2 ——— BROWN ———	1
3 ——— BLUE ———	2

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.

2. ELECTRICAL TEST CONDITION:

(a).100%OPEN,SHORT & MISWIRE TEST,

(b). INSULATOR RESISTANCE:20 Mohm MIN.

DC 300V 0.01sec.

(c). CONTACT RESISTANCE:3ohm MAX.

3.M12 CONNECTOR AC 250V 15A.

4.AC CONNECTOR AC 250V 10A.

3	3		BLACK HEAT SHRINK TUBE.
2	1		M12 3P MALE SOLDER TYPE,BLACK INSULATOR. (WP-03M2-43-11)
1	1		90°AC POWER OD:7.2MM BLACK.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Secon International Enterprise Co., Ltd.
DRAWN	Luyangchun	SCALE	FREE	TITLE
CHECK,BY		REV	A	M12 3P M/90° AC POWER
APP,BY		DATE	2020/11/12	TOLERANCES
DWG NO.	SE-S-0423			X.= ± .X= ± .XX= ± .XXX= ±
PART NO.	SE-S-0423			SHEET 1/1 SIZE A4