



DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2018/12/18	
B	CHANGE LENGTH	2019/01/08	

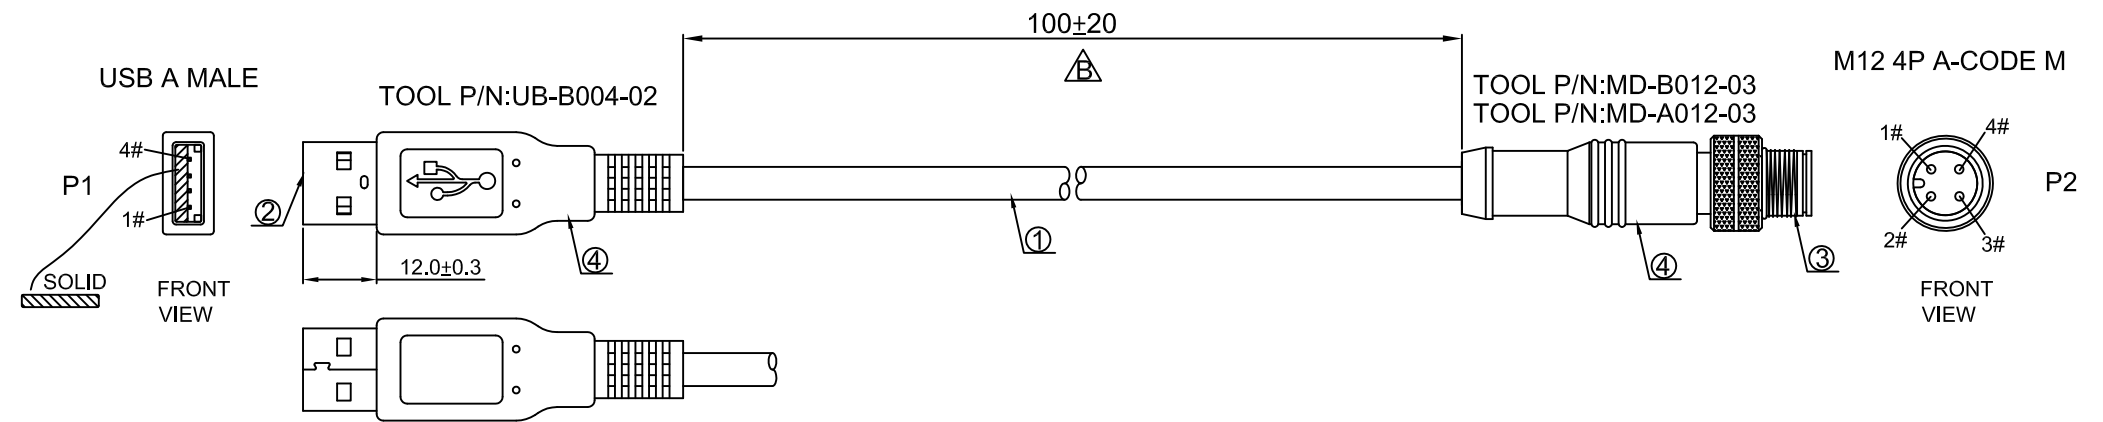

PIN ASSIGNMENT

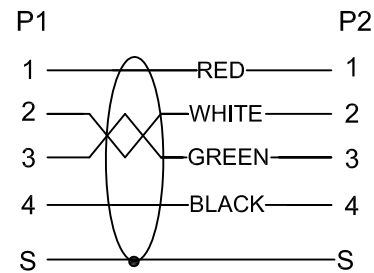

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3 ohm MAX.

4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1		M12 4P A-CODE MALE BLACK INSULATOR SOLDER TYPE.
2	1	A0182	USB A MALE WHITE INSULATOR SOLDER TYPE.
1	1	E0843	28AWG*1P+24AWG*2C+ADB OD:4.5MM BLACK PVC JACKET UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	DENG ZHIFEI	SCALE	FREE	TITLE				
CHECK,BY	<i>Caojiawei</i>	REV	B	USB A M/M12 4P A-CODE M				
APP,BY	<i>Mr. Huang</i>	DATE	2018/12/18	TOLERANCES				
DWG NO.	SE-S-0373			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.				SHEET	1/1	SIZE	A4	