



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2019/09/12	

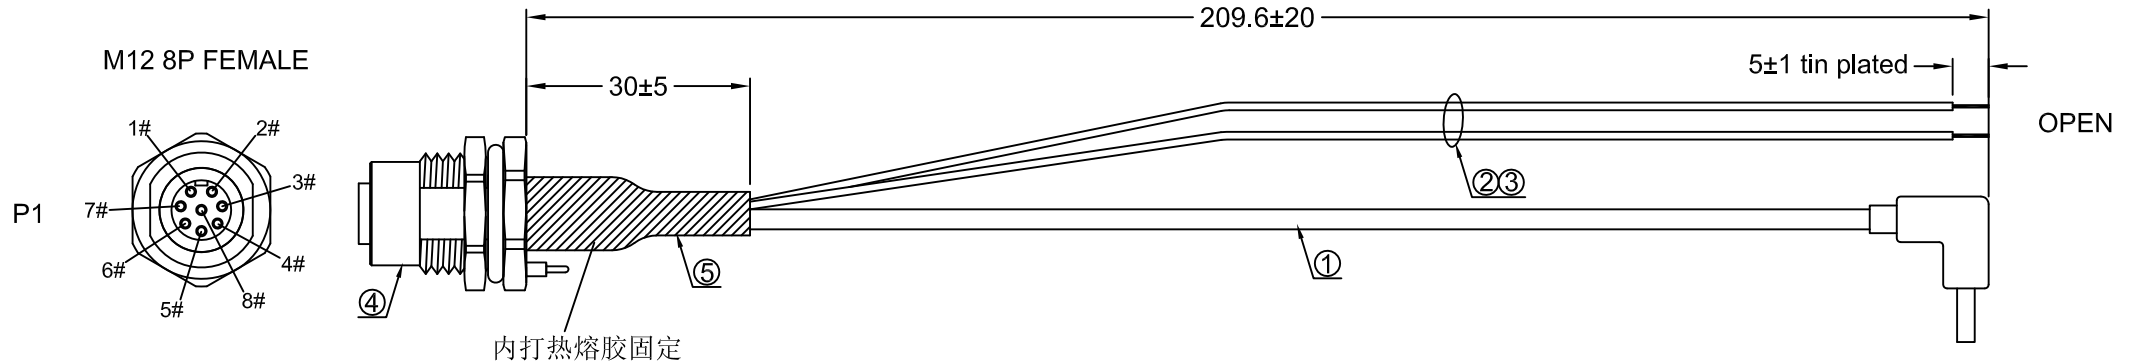

PIN ASSIGNMENT

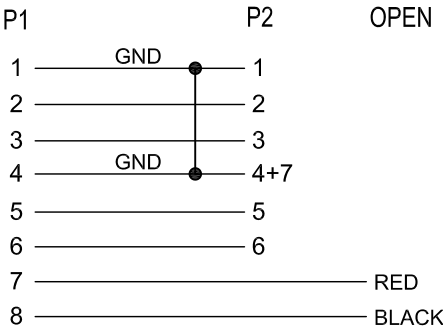

- NOTES:
- 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 - 2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE:3 ohm MAX.

5	1	T0055	黑色热熔胶套管.
4	1		M12 8P FEMALE BLACK INSULATOR SOLDER TYPE.
3	1	F0011	HOOK UP-WIRE:24AWG BLACK UL1007.
2	1	F0106	HOOK UP-WIRE:24AWG RED UL1007.
1	1		SATA 7P CABLE.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		 Seconn International Enterprise Co., Ltd.
DRAWN	<i>Deng zhifei</i>	SCALE	FREE	TITLE
CHECK,BY	<i>Caojiawei</i>	REV	A	M12 8P F/SATA 7P+OPEN
APP,BY	<i>Mr.Huang</i>	DATE	2019/09/12	TOLERANCES
DWG NO.	SE-S-0398			X.= ± .X= ± .XX= ± .XXX= ±
PART NO.				SHEET 1/1 SIZE A4