


RoHS COMPLIANT

D	CHANGE LENGTH	2011/11/23		DESCRIPTION CONTROL			
E	ADD LENGTH	2018/11/29		REV	DESC	DATE	APP
F	CHANGE CABLE	2019/01/10		A	FIRST RELEASE	2011/10/24	
				B	CHANGE DESCRIPTION	2011/10/26	
				C	CHANGE PIN ASSIGNMENT	2011/11/03	

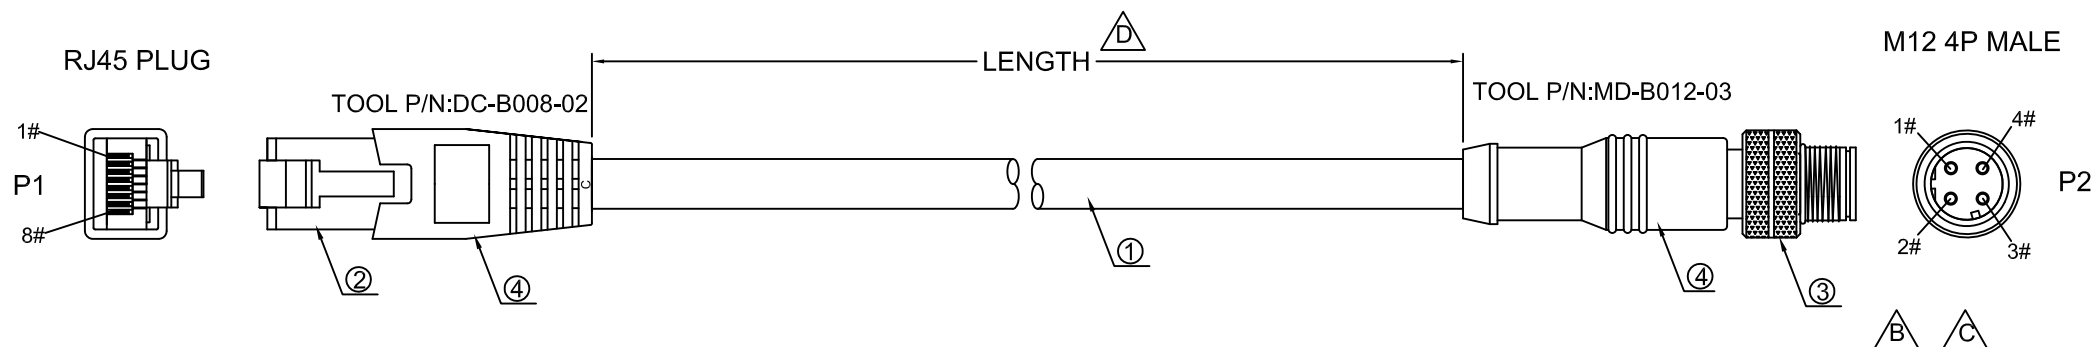


PART NUMBER	LENGTH
SE-S-0036-2M	2000±30
SE-S-0036-5M	5000±30
SE-S-0036-10M	10000±100
SE-S-0036-20M	20000±150

E

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01~0.18sec,
 - CONTACT RESISTANCE: 3~5 ohm MAX.

PIN ASSIGNMENT

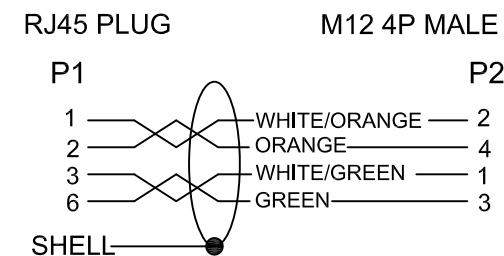

4		G0003	ALL CONNECTORS OVERMOLD GREEN PVC.
3	1	A0663	M12 4P MALE D CODE SOLDER TYPE, BLACK INSULATOR. E
2	1	A0154	RJ45 8P8C PLUG, WITH SHELL.
1	1		CAT.5E STP 24AWG*4PAIR OD:6.0MM GREEN PVC JACKET. F
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE	TITLE			
CHECK, BY	cao jiawei	REV	F	M12 4P MALE TO RJ45 PLUG			
APP, BY	Mr, Huang	DATE	2011/11/23	TOLERANCES			
DWG NO.	SE-S-0036			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0036-*M			SHEET	1/1	SIZE	A4