
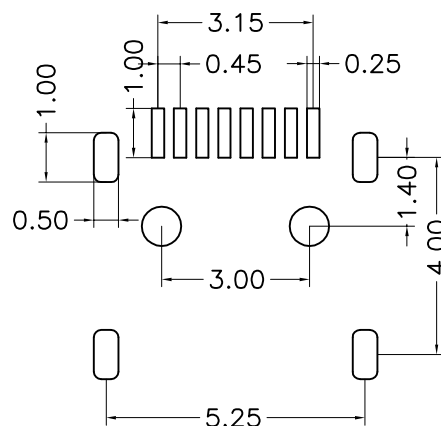
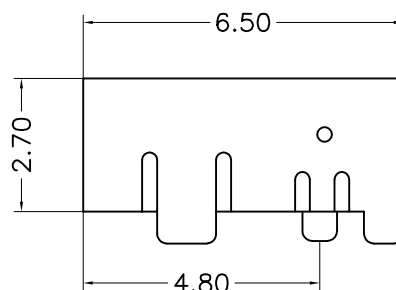
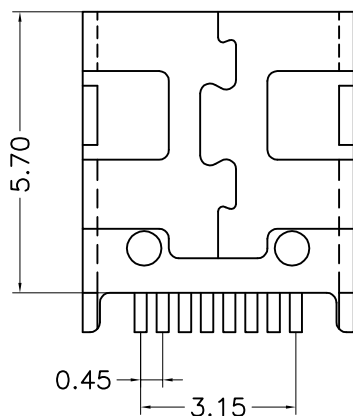
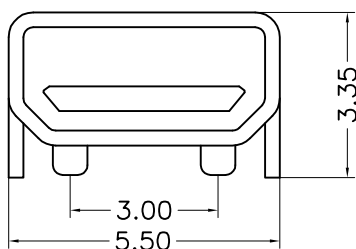




PCB LAYOUT

規格說明: Specifications:

電氣特性: Electrical:

1.接觸阻抗: Contact Resistance
50 milliohms MAX

2.耐電壓: Dielectric Withstanding Voltage:
100 V AC AT Sea Level

3.絕緣阻抗: Insulation Resistance:
100 Mega ohms MIN

原材料: Material:

1.塑膠: Housing:
High Temperature Thermoplastics;
UL 94V-0

2.端子: Contact: Copper Alloy C2680H

3.外殼: Shell: Copper Alloy C2680H

電鍍: Finish:

1.端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails

2. 外殼: Shell:
Gold / Nickel Plating



Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x. = ± 0.30 x.x = ± 0.20 x.xx = ± 0.10 x.xxx = ± 0.05				Mini USB 8 Pin Female connector 4 Feet Dip Type 3.35mm			
			UNIT				
			mm				
DRAWN	LIU	DATE	2020/04/24	PART NO.	MU8USB-S08FD-G01		
SCALE	FREE	SIZE	A4	SHEET	1/1	REV	A