



型号	模号

變更內容	變更日期	版本

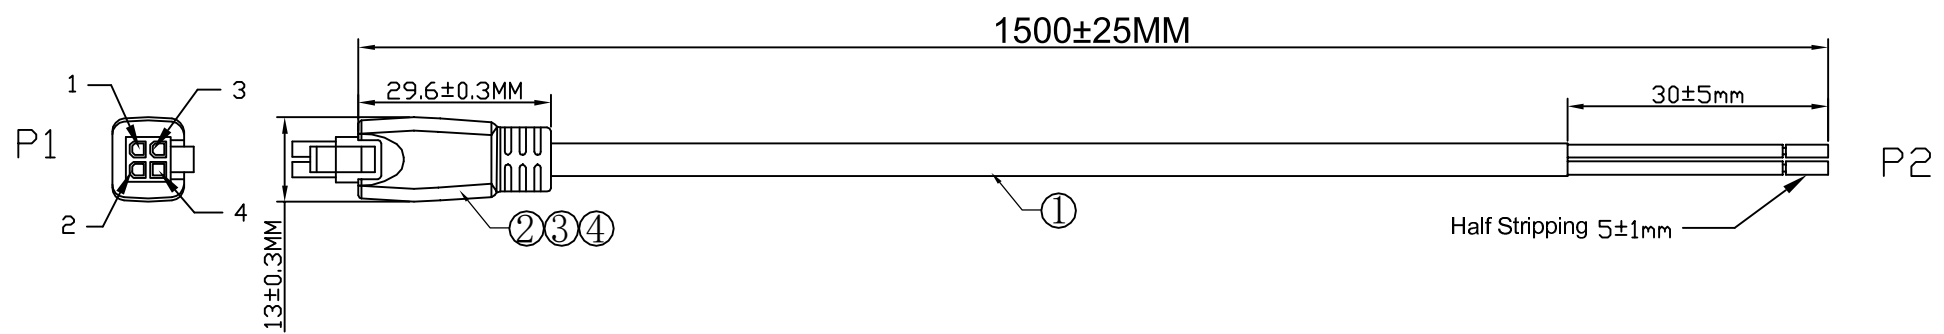

PACKING:

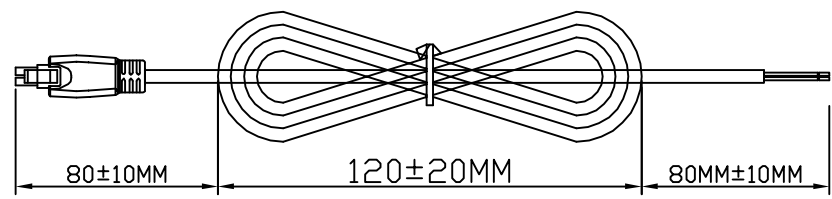

PIN ASSIGNMENT



TEST CONDICTION:

- 1.100% OPEN SHORT & MISWIRE TEST.
- 2.CONDUCTOR RESISTANCE:3Ω/MAX
- 3.INSULATION RESISTANCE:10MΩ/MIN.
- 4.HI-POT:DC 300V.0.01sec.

PART LIST: ALL "ROHS" COMPLIANT, ALL MATERIALS ARE EQUIVALENT.

4	OVERMOLD BLACK PVC 45P MA-001.		KG/K
3	MOLEX:43025-0400 OR EQ	1	SET
2	MOLEX:43030-0001 OR EQ	1	SET
1	CABLE: UL2464 20AWG*2C OD:4.5MM BLACK PVC JACKET	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

Sc Seconn International Enterprise Co., Ltd.

TOLERANCES		PROJECTION	TITLE				
AS DRAWING			Micro-Fit 3.0mm 2x2 Pin to Half Stripping Cable L: 1500mm				
		UNIT mm					
DRAWN	Diana	DATE	2021/07/28	PART NO.	SC-S-2107-2801		
SCALE	X:1	SIZE	A4	SHEET	1/1	REV	A