


**RoHS COMPLIANT**

D	CHANGE M12 5P F	2011/11/29	DESCRIPTION CONTROL			
D1	CHANGE M12 5P F	2011/11/30	REV	DESC	DATE	APP
			A	FIRST RELEASE	2011/10/24	
			B	CHANGE DESCRIPTION	2011/10/26	
			C	CHANGE LENGTH	2011/11/23	

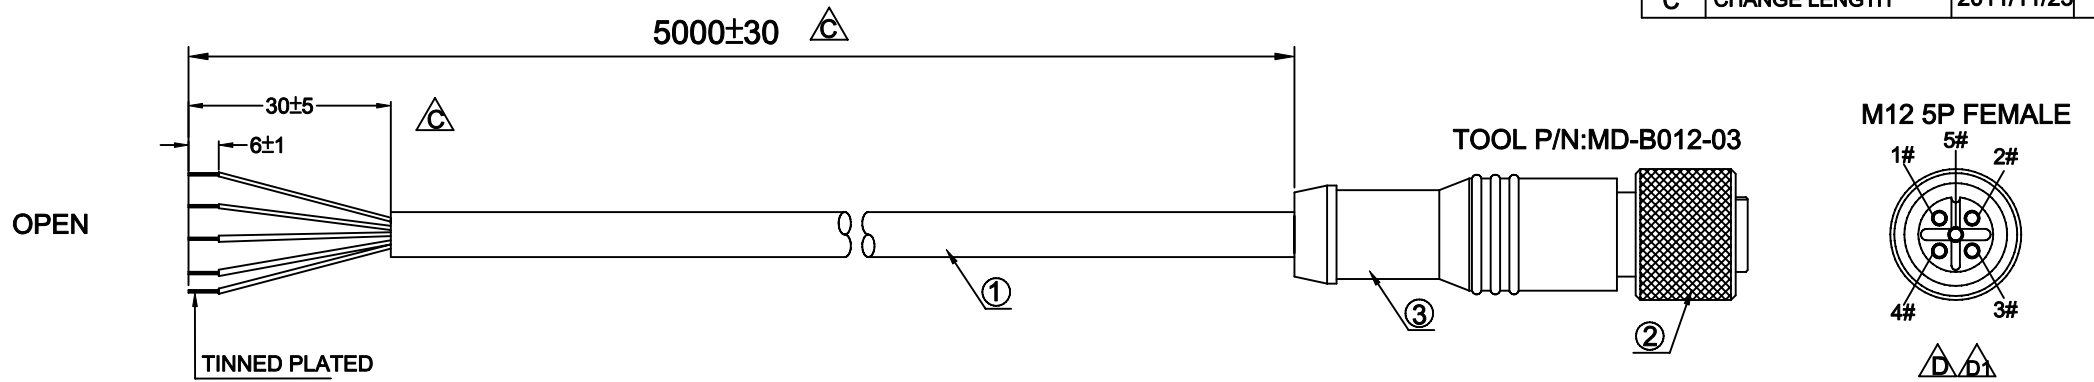

**NOTES:**

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
  - (a). 100% OPEN, SHORT & MISWIRE TEST,
  - (b). INSULATOR RESISTANCE: 20 Mohm MIN.  
DC 300V 0.01sec,
  - (c). CONTACT RESISTANCE: 3 ohm MAX.

**PIN ASSIGNMENT**

	OPEN	M12 5P FEMALE	
BROWN	_____	_____	1
WHITE	_____	_____	2
BLUE	_____	_____	3
BLACK	_____	_____	4
GREEN	_____	_____	5



3		G0061	CONNECTOR OVERMOLD BLACK PU.
2	1	A0568	M12 5P FEMALE A CODE SOLDER TYPE, BLACK INSULATOR.
1	1	E0735	UL2464 24AWG*6C+EA OD:5.3MM BLACK PVC JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.
DRAWN	<i>Wushijie</i>	SCALE	1:1	TITLE
CHECK, BY	James	REV	D1	M12 5P FEMALE TO OPEN
APP, BY	Mr, Huang	DATE	2011/11/30	TOLERANCES
DWG NO.	SE-S-0035			X.= ±    .X= ±    .XX= ±    .XXX= ±
PART NO.		SHEET	1/1	SIZE A4