


型号	模号


變更內容	變更日期	版本
ADD LABEL	20210709	A1
REVISE PACKING	20211210	A2

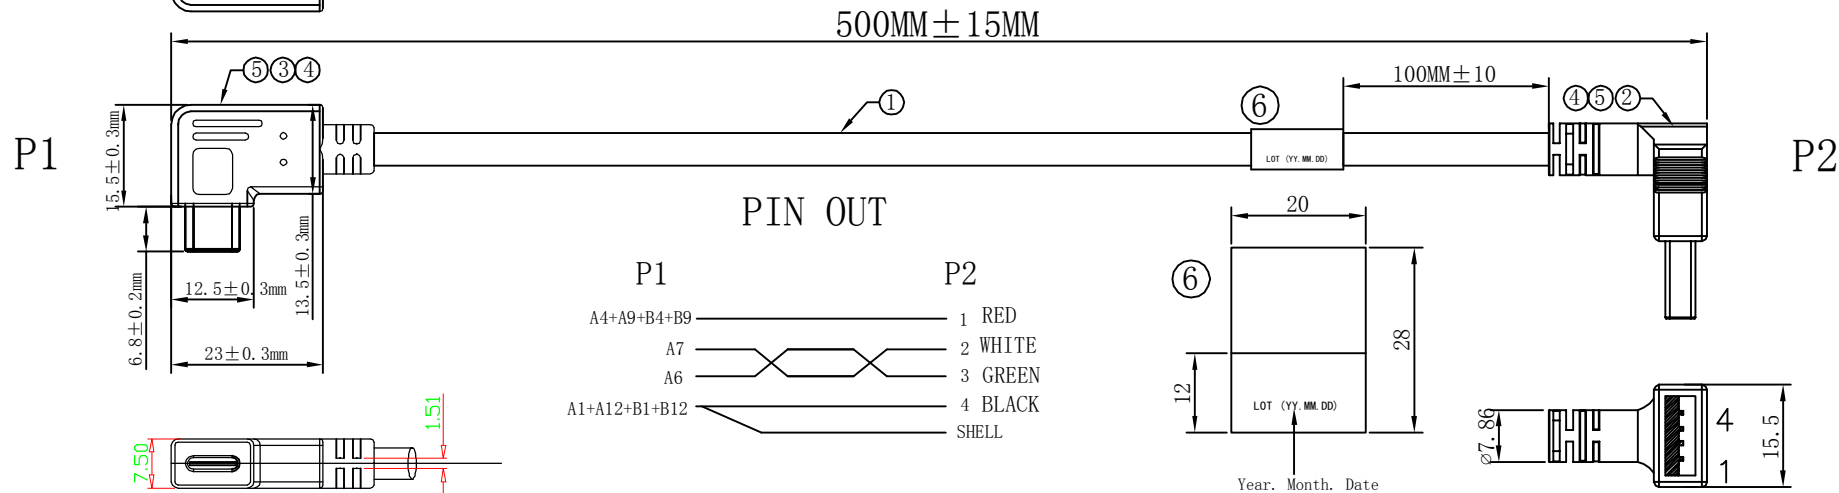

PACKING: ZIP 1PCS/BAG, LABEL OUTSIDE

Note:

1. 100% OPEN SHORT & MISWIRE TEST.
2. CONDUCTIVE RESISTANCE: 2Ω/MAX.
3. INSULATION RESISTANCE: 10M Ω/MIN.
4. HI-POT TEST: AT DC 300V.
5. USB 3.1 C~C GEN2.

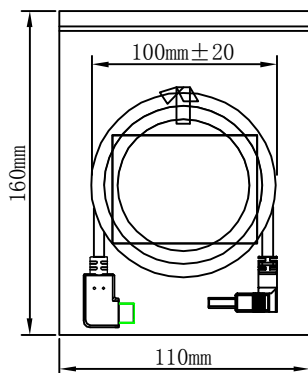

PART LIST: ALL "ROHS" COMPLIANT, ALL MATERIALS ARE EQUIVALENT.

6	CABLE LABEL 28mm*20mm	1	PCS
5	MOLD: LDPE.		KG/K
4	MOLD: 45P PVC COLOR: BLACK.		KG/K
3	TYPE CM: BLACK PBT WITH GOLD PLATED SHELL	1	SET
2	USB AM: GOLD CONNECTOR, GOLD PLATED SHELL, PLASTIC: WHITE	1	PCS
1	UL2725 28AWG*1P+24AWG*2C+AEB OD4.5MM. JACKET BLACK TEMP (-20C~+70C). ANTI-SWING DESIGN.		mm
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

TOLERANCES		PROJECTION		TITLE			
AS DRAWING				USB 2.0 A Male Down Angle to TYPE C USB Male Right Angle Cable			
		mm					
DRAWN	Tan	DATE	2020/09/11	PART NO.	SC-S-2009-1114		
SCALE	NONE	SIZE	A4	SHEET	1/1	REV	A2