


**RoHS COMPLIANT**

DESCRIPTION CONTROL				DESCRIPTION CONTROL			
REV	DESC	DATE	APP	REV	DESC	DATE	APP
E	CHANGE DRAWING	2021/11/26		A	FIRST RELEASE	2019/11/20	
F	CHANGE DRAWING	2021/12/21		B	CHANGE DRAWING	2021/08/20	
G	CHANGE DRAWING	2022/01/19		C	CHANGE DRAWING	2021/09/07	
H	CHANGE DRAWING	2022/05/17		D	ADD PACKING	2021/09/24	

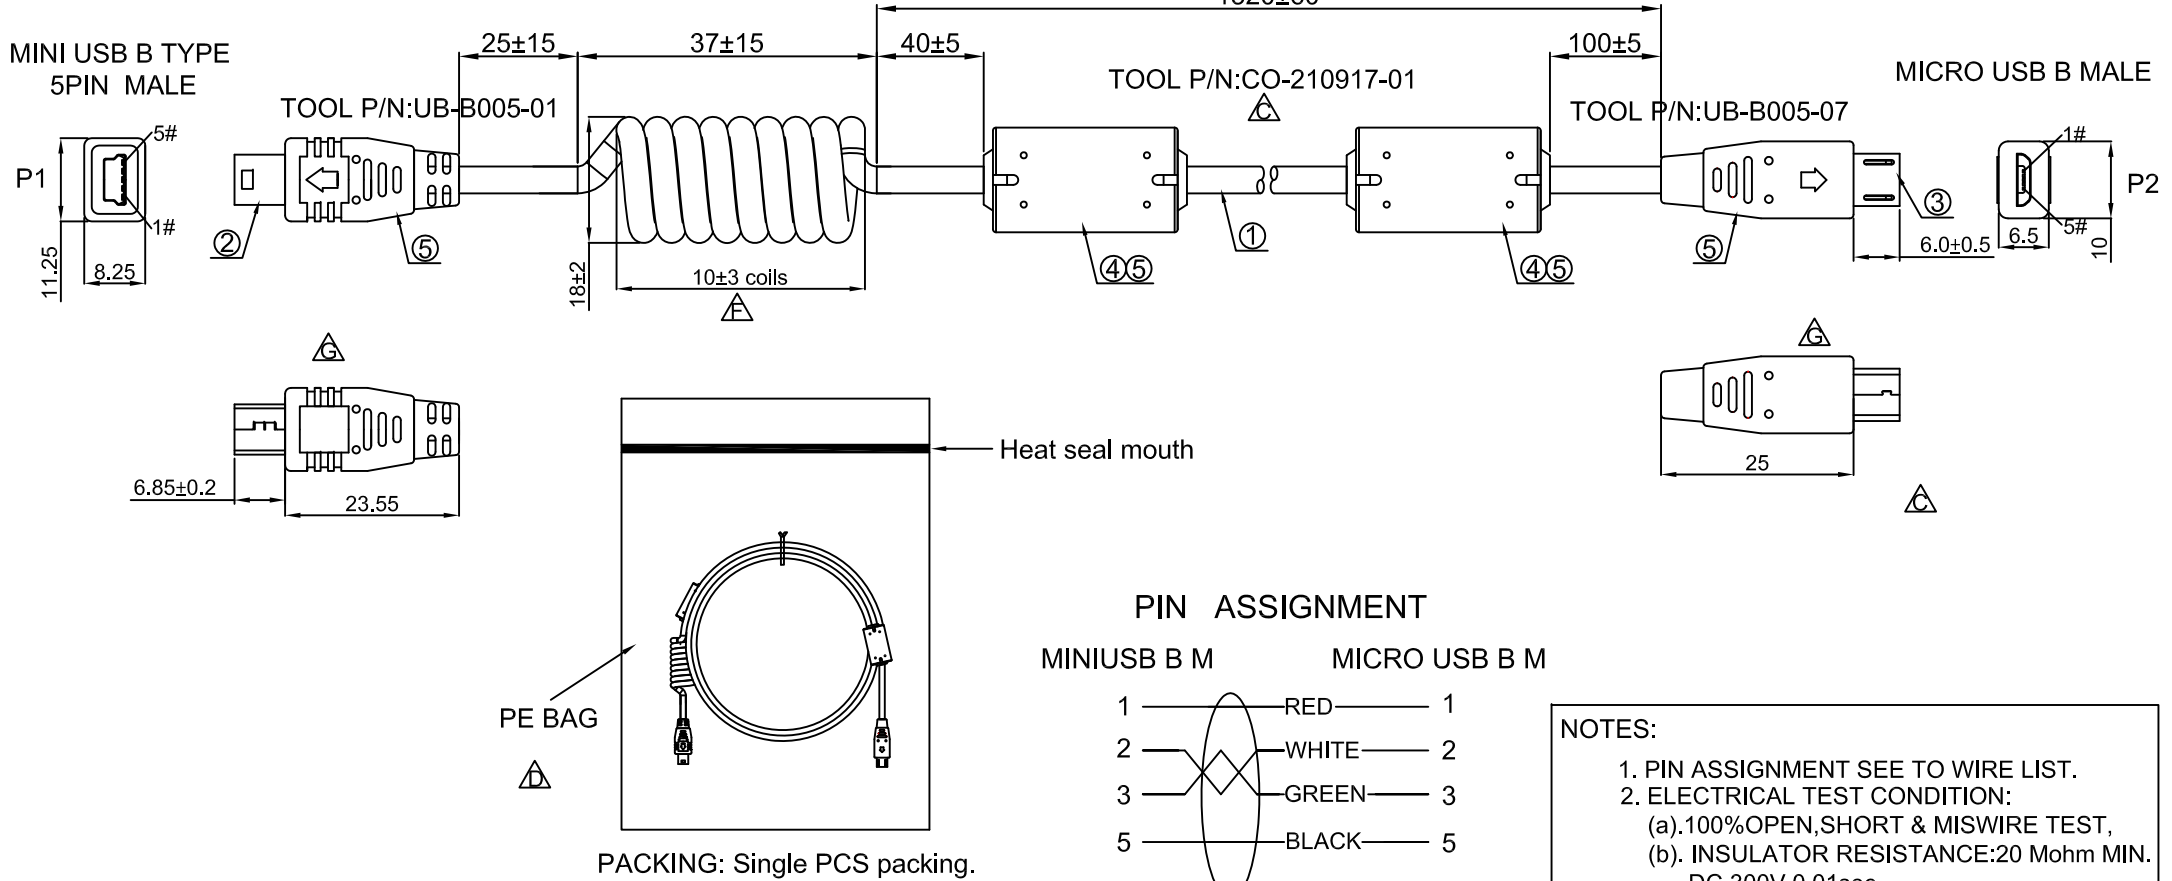

**NOTES:**

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
  - 100% OPEN, SHORT & MISWIRE TEST,
  - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec,
  - CONTACT RESISTANCE: 3 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
5	1	G0061	ALL CONNECTORS OVERMOLD BLACK TPU.
4	2	T0289	CORE:12.3*25.4*4.95MM(2631480002)
3	1	A0625	MICRO USB B 5P MALE GOLD PLATED 30U" BLACK INSULATOR.
2	1	A0197	MINI USB B 5P MALE GOLD PLATED 30U" BLACK INSULATOR.
1	1	E1365	28AWG*1P+28AWG*2C+AD+S OD:3.5MM BLACK TPU JACKET COIL OD:18.0MM L=50MM+37MM+1360MM UL20554.

UNIT	mm	Projection	Se	Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Lu yangchun</i>	SCALE	FREE	TITLE			
CHECK, BY		REV	H	MINI USB 5P M TO MICRO USB 5P M			
APP, BY		DATE	2019/11/20	TOLERANCES			
DWG NO.	SE-S-0410			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.		SHEET	1/1	SIZE	A4		