


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2019/07/18	

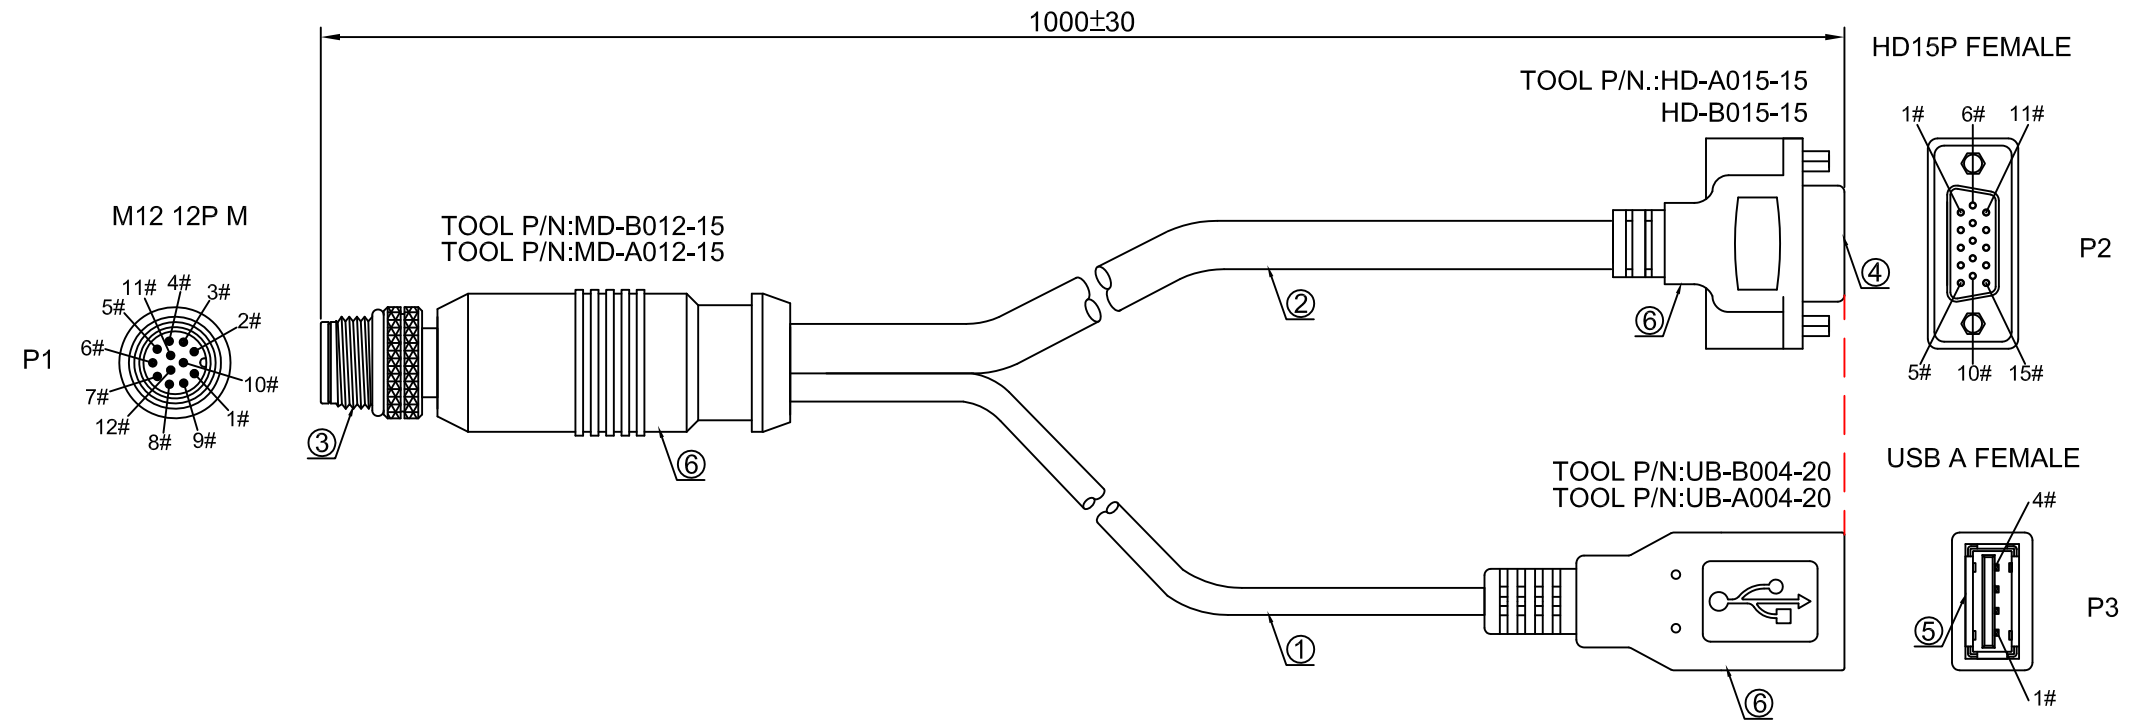


6		G0001	ALL CONNECTOR OVERMOLD BLACK PVC.
5	1	A0183-1/ D0059	USB A TYPE FEMALE SOLDER TYPE,WHITE INSULATOR.
4	1	A0146	HD15P FEMALE SOLDER TYPE FRONT NUT,BLUE INSULATOR.
3	1	A0584	M12 12P MALE,SOLDER TYPE BLACK INSULATOR.
2	1	E0208	UL2919 UL1354 28AWG/3COAX+28AWG/9C+AEB OD:8.5MM JACKET:BLACK.
1	1	E0843	28AWG*1P+24AWG*2C+AEB OD:4.5MM BLACK JACKET UL2725.
ITEM	QTY	PART NO.	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE	TITLE				
CHECK,BY	Cao jiawei	REV	A	M12 12P M/HD15 F+USB A F				
APP,BY	Mr.Huang	DATE	2019/07/18	TOLERANCES				
DWG NO.	SE-S-0392			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	SE-S-0392-1M			SHEET	1/2	SIZE	A4	

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2019/07/18	

PIN ASSIGNMENT

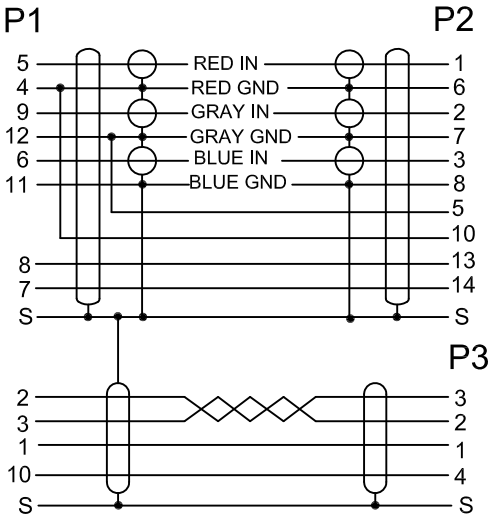

NOTES:

- 1. PIN ASSIGNMENT SEE TO WIRE LIST.
- 2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE:3ohm MAX.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE	TITLE				
CHECK,BY	Bao jiawei	REV	A	M12 12P M/HD15 F+USB A F				
APP,BY	Mr.Huang	DATE	2019/07/18	TOLERANCES				
DWG NO.	SE-S-0392			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	SE-S-0392-1M			SHEET	2/2	SIZE	A4	